


## 8-Push-Button K-I8-EDB-000



### Certifications

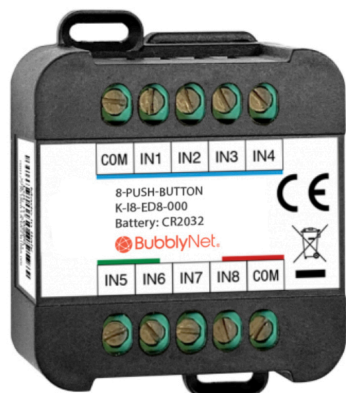

### Installation

The 8-Push-Button is a battery-operated device which really easy to install. The device must be installed inside an electrical panel protected against other voltages in a vertical or horizontal position with the label upwards or vertically.

### Connectivity

Devices are repeaters for other devices and should be installed within a certain maximum distance from each other.

Typical maximum distance:

<u>Outdoor (line of sight):</u>	200ft
<u>Indoor (through building material):</u>	
Glass:	100ft
Drywall:	70ft
Cinderblock:	60ft
Brick:	50ft
Concrete + rebar	0ft

For design purposes a 60ft. maximum distance is appropriate for most installations.

### Description

The 8-Push Buttons interface is a wireless user interface that can be configured by BubblyNet App. It allows to connect up to 8 inputs and transforms any push-button switch into a smart Bluetooth NLC battery-powered switch.

### Features

- Wireless, Bluetooth Mesh
- Battery-operated (CR2032 Battery)
- Protection Grade: IP 20
- Connect to up to 8 Inputs (Buttons)
- Easy Reconfiguration with the use of the BubblyNet App
- Smooth Dimming, Recall Animations and Control and Recall Scenes.
- Dimensions: 1.73" x 2.24" x 0.75" (44mm x 57mm x 19mm)

### Applications

The push buttons can smooth dimming the luminaire pre-set, control a luminaire, control a group of luminaires or all luminaires into the network, control a scene, control an animation or shades, all configurations can be set via the BubblyNet app.

Examples of pushbuttons to be used in conjunction with the K-I8-EDB-000:



Hope - Atelier Luxus  
(not a BubblyNet product)



Manhattan - Luxonov  
(not a BubblyNet product)



Chopin - Basalte  
(not a BubblyNet product)